



Primary magnet face is marked with a CMR PN.
 Markings must be aligned and facing the same direction.
 Magnets must be axially constrained for proper performance.

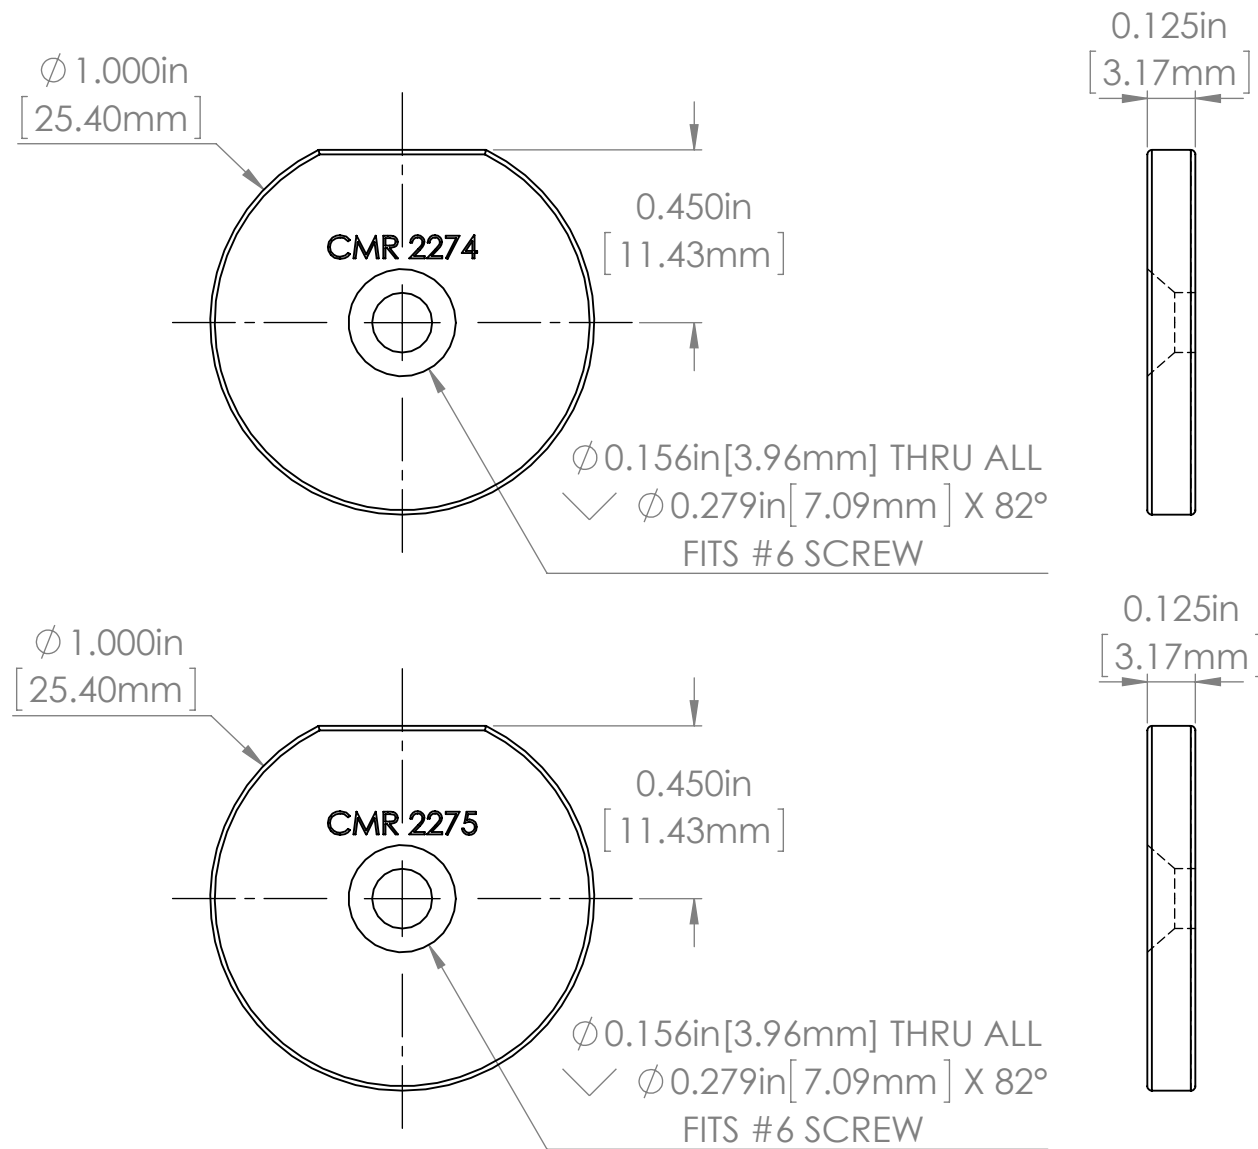

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 ANGLES $\pm 0.1^\circ$
 2 PL ± 0.01 (.25mm)
 3 PL ± 0.005 (.13mm)

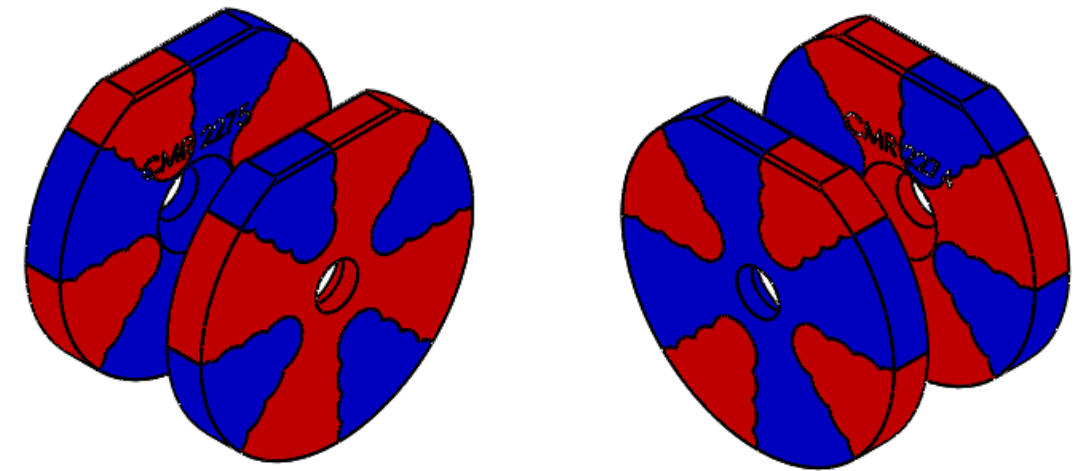

PART NO 1002305		
SIZE B	DWG. NO. 1002305-APP	REV 0
SCALE: 2:1	RELEASE DATE:	SHEET 1 OF 1